


Wall Covering / Homogeneous Vinyl Flooring

Capilla®

The most durable and hygienic wall cover and homogeneous flooring option which can withstand harsh treatment. It brings uniformity to the décor through multiple surface uses. It is a high performance polymer, which can withstand any amount of weathering. With biocides it provides a sterile surface throughout the lifetime of the product.

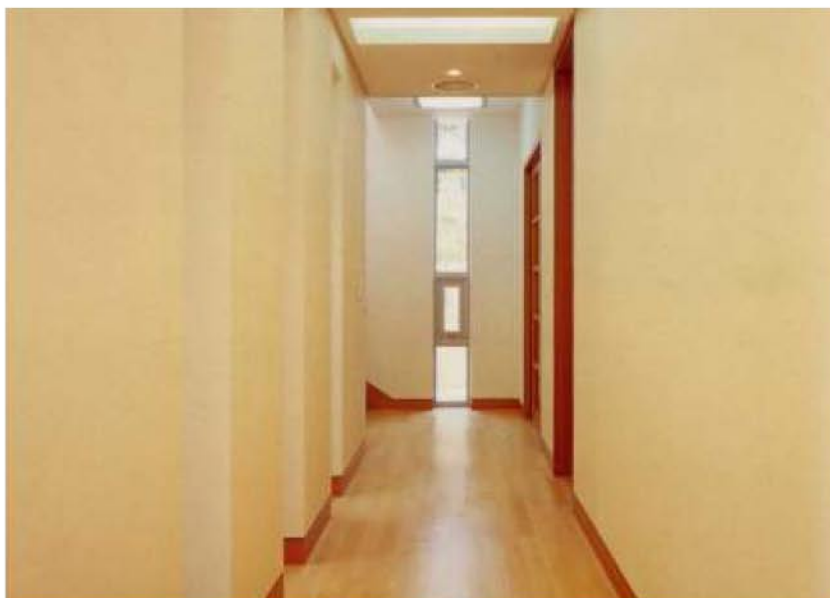

Key Features:

- No Wax, No Polish
- PUR
- Pastel Colours
- Quick Drying
- Anti Bacterial, Anti Fungi
- Available in 1 ~ 2 mm Sheet

Applications:

- Hospitals
- Health Clubs
- Schools
- Restaurants, etc.


TUSKER
VINYL FLOORING



Floors Made
UGC
Using German Collaboration



IS : 3462



PUR
REINFORCED




9939 - 372 - 4



9939 - 375 - 4





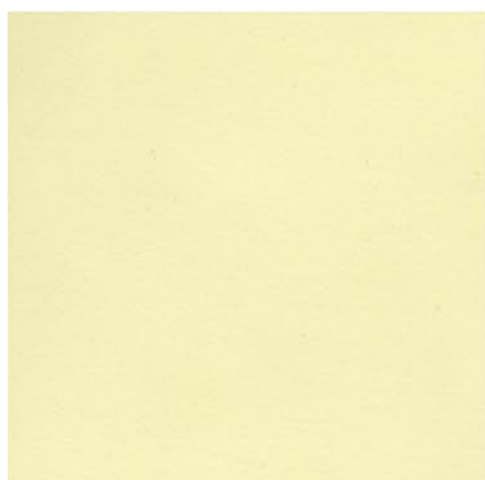















9939 - 379 - 4



9939 - 380 - 4

RESPONSIVE Vinyl Flooring

The solution to every flooring need

Technical Data		Capilla®
 GENERAL PERFORMANCE: EN 685 : 1996 EN 649 : 1997	 	<ul style="list-style-type: none"> • Homogeneous Single Layered Vinyl Wall Covering • Polyurethane Reinforced
 Thickness:	EN 428	1.00 mm ~ 2.00 mm
 Sheet:	EN 426	1 mm ~ 2 mm: 2m x 10m = 20m ²
 Weight:	EN 430	1.00mm: 1.70 kg/m ² 2.00mm: 3.40 kg/m ²
 REACTION TO FIRE:	BS 476 Part 6 BS 476 Part 7 ASTM E648-06 AS/NZS 3837	(l) < 12 (i) < 6 Class 1 Type I Group 1
 CLEAN ROOMS:	ASTM F51/68	Class A - non-shedding Suitable for use in following classes of clean room: Class 4 ISO 1466-11999
 LIGHT FASTNESS:	ISO 105 - B02 Method 3 EN 20105: B02	≥ 6 > Blue Wool Standard 6
 FLEXIBILITY:	EN 435 ASTM F137	< 20mm Pass
 DIMENSIONAL STABILITY:	EN 434	< 0.4 mm
 WEAR LAYER THICKNESS:	EN 429	1 mm ~ 2 mm
 STAIN and CHEMICAL RESISTANCE:	EN 423	Good Resistance
 SMOKE DENSITY:	ASTM E 662-05	< 450
 FUNGI and BACTERIA RESISTANCE:		Does not favor growth
 MARITIME USAGE:	US Coast Guard Approved Marine Equipment Directive IMO RES A 653 (16) IMO MSC 61(67)	Annex 1 Part 2 (Smoke & Toxicity) Part 5 (Spread of Flame) and Annex 2 (Surface Flammability / Heat Release)  1121
 COLOURS AVAILABLE:		4 Shades

For more details/clarification regarding technical specifications, handling and installation, please contact Responsive Flooring.
 Note: The samples shown are representative. For technical reasons the material may vary in shades and appearance. The pattern given are with their product codes.

RESPONSIVE Industries Limited

Eucharistic Congress Building No.I, 5 Convent Street,
 Colaba, Mumbai 400 001, India.

- Tel. +91 22 6656 2727 / 6656 2704
- Fax +91 22 6656 2798 / 6656 2799
- E-mail: enquiry@responsiveindustries.com
- URL: www.responsiveindustries.com

